


DEEP GROOVE BALL BEARINGS



CHINA HOSIN

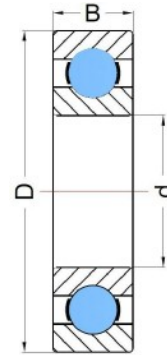

This series bearing mainly takes radial load as well as take moderate axial load. With less coefficient of friction, high limiting speed, large size and colourful combination of structure; they are suitable for tractors, motors, automobiles, motorcycles, and other common machinery, as a widely used type of bearings in machinery industry.

Type	d	D	B	weight(kg)	Type	d	D	B	weight(kg)
6000	10	26	8	0.019	6200	10	30	9	0.032
6001	12	28	8	0.022	6201	12	32	10	0.037
6002	15	32	9	0.030	6202	15	35	11	0.045
6003	17	35	10	0.039	6203	17	40	12	0.065
6004	20	42	12	0.069	6204	20	47	14	0.110
6005	25	47	12	0.080	6205	25	52	15	0.130
6006	30	55	13	0.120	6206	30	62	16	0.200
6007	35	62	14	0.160	6207	35	72	17	0.290
6008	40	68	15	0.190	6208	40	80	18	0.370
6009	45	75	16	0.250	6209	45	85	19	0.410
6010	50	80	16	0.260	6210	50	90	20	0.460
6011	55	90	18	0.390	6211	55	100	21	0.610
6012	60	95	18	0.420	6212	60	110	22	0.780
6013	65	100	18	0.440	6213	65	120	23	0.990
6014	70	110	20	0.600	6214	70	125	24	1.050
6015	75	115	20	0.640	6215	75	130	25	1.200
6016	80	125	22	0.850	6216	80	140	26	1.400
6017	85	130	22	0.890	6217	85	150	28	1.800
6018	90	140	24	1.150	6218	90	160	30	2.150
6019	95	145	24	1.200	6219	95	170	32	2.600
6020	100	150	24	1.250	6220	100	180	34	3.150
6022	110	170	28	1.950	6222	110	200	38	4.350
6024	120	180	28	2.050	6224	120	215	40	5.150
6026	130	200	33	3.150	6226	130	230	40	5.800
6028	140	210	33	3.350	6228	140	250	42	7.450
6030	150	225	35	4.800	6230	150	270	45	9.400
6032	160	240	38	5.900	6232	160	290	48	14.50
6034	170	260	42	7.900	6234	170	310	52	17.50
6036	180	280	46	10.50	6236	180	320	52	18.50
6038	190	290	46	11.00	6238	190	340	55	23.00
6040	200	310	51	14.00	6240	200	360	58	28.00
6044	220	340	56	18.50	6244	220	400	65	37.00

DEEP GROOVE BALL BEARINGS



CHINA HOSIN

Type	d	D	B	weight(kg)	Type	d	D	B	weight(kg)
6300	10	35	11	0.053	6403	17	62	17	0.27
6301	12	37	12	0.06	6404	20	72	19	0.4
6302	15	42	13	0.082	6405	25	80	21	0.53
6303	17	47	14	0.12	6406	30	90	23	0.74
6304	20	52	15	0.14	6407	35	100	25	0.95
6305	25	62	17	0.23	6408	40	110	27	1.25
6306	30	72	19	0.35	6409	45	120	29	1.55
6307	35	80	21	0.46	6410	50	130	31	1.9
6308	40	90	23	0.63	6411	55	140	33	2.3
6309	45	100	25	0.83	6412	60	150	35	2.75
6310	50	130	27	1.05	6413	65	160	37	3.3
6311	55	120	29	1.35	6414	70	180	42	4.85
6312	60	130	31	1.7	6415	75	190	45	6.8
6313	65	140	33	2.1	6416	80	200	48	8
6314	70	150	35	2.5	6800	10	19	5	0.0055
6315	75	160	37	3	6801	12	21	5	0.0063
6316	80	170	39	3.6	6802	15	24	5	0.0074
6317	85	180	41	4.25	6803	17	26	5	0.0082
6318	90	190	43	4.9	6804	20	32	7	0.018
6319	95	200	45	5.65	6805	25	32	7	0.022
6320	100	215	47	7	6806	30	42	7	0.027
6321	105	225	49	8.25	6808	40	52	7	0.034
6322	110	240	50	9.55	6809	45	58	7	0.04
6324	120	260	55	14.5	6810	50	65	7	0.052
6326	130	280	58	18	6812	60	78	10	0.11
6328	140	300	62	22	6813	65	85	10	0.13
6330	150	320	65	26	6814	70	90	10	0.14
6900	10	22	6	0.01	16002	15	32	8	0.025
6901	12	24	6	0.011	16003	17	35	8	0.032
6902	15	28	7	0.016	16004	20	42	8	0.05
6903	17	30	7	0.018	16005	25	47	8	0.06
6904	20	37	9	0.038	16006	30	55	9	0.085
6905	25	42	9	0.045	16007	35	62	9	0.11
6906	30	47	9	0.051	16008	40	68	9	0.13
6907	35	55	10	0.08	16009	45	75	10	0.17
6908	40	62	12	0.12	16010	50	80	10	0.18
6909	45	68	12	0.14	16011	55	90	11	0.26
6910	50	72	12	0.14	16012	60	95	11	0.28
6912	60	85	13	0.2	16013	65	100	11	0.3
6913	65	90	13	0.22	16014	70	110	13	0.43
6914	70	110	16	0.35	6914	70	110	16	0.35

DEEP GROOVE BALL BEARINGS



CHINA HOSIN

Type	d	D	B	Bs	weight(g)	Type	d	D	B	Bs	weight(g)
R144	3.175	6.35	2.38	2.779	0.25	684	4	9	2.5	4	0.63
R154	3.175	7.938	2.779	2.779	0.55	694	4	11	4	4	1.7
R2.5	3.175	7.938	2.779	3.571	0.55	604	4	12	4	4	2.25
R2.6	3.175	9.252	2.779	3.571	0.96	624	4	13	5	5	3.03
R164	3.175	9.252	2.38	2.38	0.94	634	4	16	5	5	5.24
R2	3.175	9.252	2.38	3.967	1.36	675	5	8	2	2.5	0.26
R174	3.175	10.414	2.779	2.779	1.28	685	5	11	3	5	1.2
R184	3.175	12.7	2.779	2.779	1.44	695	5	13	4	4	2.45
R2A	3.175	12.7	4.366	4.366	3.3	605	5	14	5	5	3.54
R155	3.967	7.938	2.779	3.175	0.51	625	5	16	5	5	4.95
R156	4.762	7.938	2.779	3.175	0.39	635	5	19	6	6	8.56
R166	4.762	9.525	3.175	3.175	0.81	676	6	10	2	3	0.56
R186	4.762	12.7	2.779	3.967	1.98	686	6	13	3.5	5	1.91
R3	4.762	12.7	3.967	4.978	2.21	696	6	15	5	5	3.88
R3A	4.762	15.88	4.978	4.978	2.79	606	6	17	6	6	5.97
R168	6.35	9.525	3.175	3.175	0.57	626	6	19	6	6	8.15
R188	6.35	12.7	3.175	4.762	1.53	636	6	22	7	7	14
R4	6.35	15.88	4.978	4.978	4.46	677	7	11	2.5	3	0.62
R4A	6.35	19.05	5.558	7.142	7.48	687	7	14	3.5	5	2.1
R1810	7.938	12.7	3.967	3.967	1.56	697	7	17	5	5	5.26
R6	9.525	22.23	5.558	7.142	9.02	607	7	19	6	6	7.67
						627	7	22	7	7	12.7
672	2	4	1.2	2	0.06	637	7	26	9	9	24
682	2	5	1.5	2.3	0.12	678	8	12	2.5	3.5	0.71
692	2	6	2.3	3	0.28	688	8	16	4	5	3.25
602	2	7	2.8	3.5	0.51	698	8	19	6	6	7.23
67/2.5	2.5	5	1.5	2.3	0.11	608	8	22	7	7	12.1
68/2.5	2.5	6	1.8	2.6	0.23	628	8	24	8	8	17.2
69/2.5	2.5	7	2.5	3.5	0.41	638	8	28	9	9	28.3
60/2.5	2.5	8	2.8	4	0.63	679	9	14	3	4.5	3.05
673	3	6	2	2.5	0.2	689	9	17	4	5	3.53
683	3	7	2	3	0.32	699	9	20	6	6	8.45
693	3	8	3	4	0.61	609	9	24	7	7	14.5
603	3	9	3	5	0.87	629	9	26	8	8	19.5
623	3	10	4	4	1.65	639	9	30	10	10	36.5
674	4	7	2	2.5	0.22						