


# ANGULAR CONTACT BALL BEARINGS



CHINA HOSIN

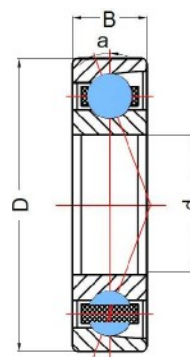

Angular contact ball bearings are able to support radial load and axial load. As single row angular contact ball bearings can only support axial load in single direction, matched bearing mounting is often adopted to them as matched parts of bearings, preload for them is more convenient.

Retainers are made of brass, synthetic resins or others subject to individual bearing features and application conditions.

Type	d	D	B	weight(kg)	Type	d	D	B	weight(kg)
7004C	20	42	12	0.08	7212C	60	110	22	0.8
7005C	25	47	12	0.093	7213C	65	120	23	1
7006C	30	55	13	0.135	7214C	70	125	24	1.1
7007C	35	62	14	0.18	7215C	75	130	25	1.2
7008C	40	68	15	0.222	7216C	80	140	26	1.45
7009C	45	75	16	0.282	7217C	85	150	28	1.85
7010C	50	80	16	0.306	7218C	90	160	30	2.3
7011C	55	90	18	0.447	7219C	95	170	32	2.7
7012C	60	95	18	0.478	7220C	100	180	34	3.3
7013C	65	100	18	0.509	7221C	105	190	36	4.33
7014C	70	110	20	0.705	7222C	110	200	38	5.1
7015C	75	115	20	0.745	7224c	120	215	40	6.22
7016C	80	125	22	0.994					
7017C	85	130	22	1.04	7303C	17	47	14	0.11
7018C	90	140	24	1.35	7304C	20	52	15	0.14
7019C	95	145	24	1.41	7305C	25	62	17	0.23
7020C	100	150	24	1.46	7306C	30	72	19	0.34
7021C	105	160	26	1.82	7307C	35	80	21	0.45
7022C	110	170	28	2.26	7308C	40	90	23	0.63
7024C	120	180	28	2.45	7309C	45	100	25	0.85
					7310C	50	110	27	1.1
7200C	10	30	9	0.03	7311C	55	120	29	1.4
7201C	12	32	10	0.036	7312C	60	130	31	1.75
7202C	15	35	11	0.045	7313C	65	140	33	2.015
7203C	17	40	12	0.065	7314C	70	150	35	2.65
7204C	20	47	14	0.11	7315C	75	160	37	3.2
7205C	25	52	15	0.13	7316C	80	170	39	3.8
7206C	30	62	16	0.2	7317C	85	180	41	4.45
7207C	35	72	17	0.28	7318C	90	190	43	5.2
7208C	40	80	18	0.37	7319C	95	200	45	6.05
7209C	45	85	19	0.42	7320C	100	215	47	7.5
7210C	50	90	20	0.47	7322C	110	240	50	11.1
7211C	55	100	21	0.62	7324C	120	260	55	14.5